





## Fire pit Frame and Top Assembly Instructions

### Assembly of Fire pit Door:


1. Remove the door from its hinges, and remove the cohesive wrap protecting its paint.
2. Remove the (2) black bushings from the hardware kit, and place them into the hinge u-clips on the frame.

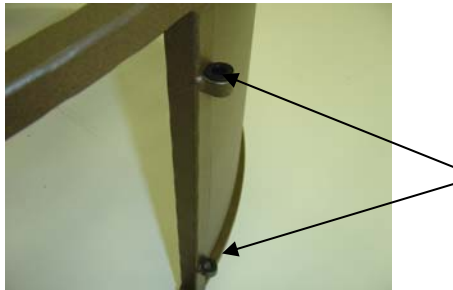

3. Insert the door back into its original position, sliding the hinge rod ends into the black bushings.

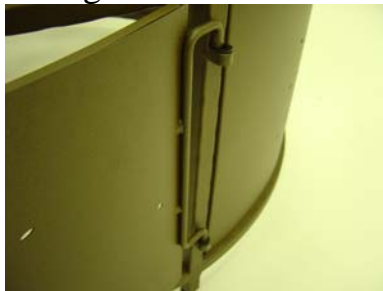

4. Remove the (2) 3/4" round magnets from the hardware kit, and place on the tabs at the inside of the door opening.

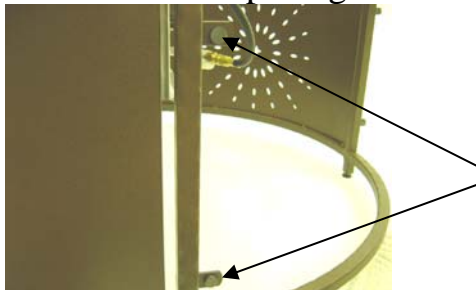


5. Close fire pit door to insure proper alignment of the magnets to hold the door in place.


The Fire pit can be purchased with either a tile or slate top surface. Below are instructions for assembling either.

For Tile:

1. Remove the (24) clear plastic bumpers from the hardware kit and place (2) on each of the square tile support bars, about 1" from the outer and inner tubes.

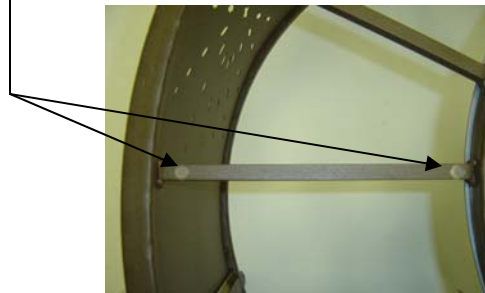

2. Remove the (6) tiles from their own carton, and place on the bumpers. The tile should rest across the braces as shown below:

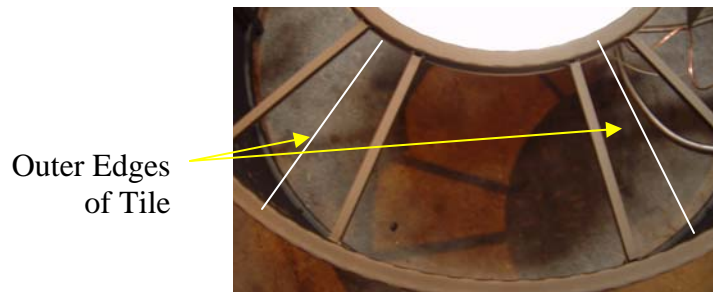

For Slate Top:

Remove the slate top from its own carton, and gently place it inside the top tube rings. **Meadowcraft recommends (2) people for this job, as the top is quite heavy.** The clear plastic bumpers are not required for this top.

Use for the Fire pit Dome Cover:

The dome cover has been included to protect the fire logs and burner from the environment while the fire pit is not in use. **Warning: Do not use the dome cover while the fire pit is ignited.** Please allow the fire pit to cool before placing dome cover over logs.

**Note: See other instructions for burner setup and log placement information.**